



PAPER TESTING ASSOCIATION


PAPER Testing Equipment



PUNCH AND DYE CUTTER

Code X.51.501.300

For punching strips for the tensile tests or for the RCT Tests

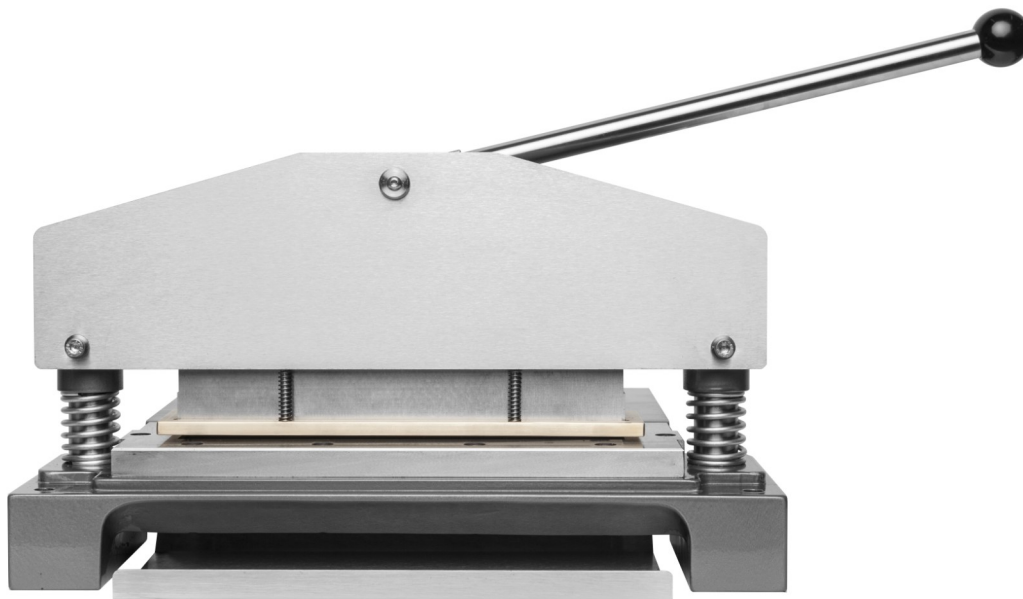

Sold & serviced by:

OpTest Equipment Inc.

www.optest.com - sales@optest.com - +1-613-632-5169



DEVICE DESCRIPTION :

The robust strip punch functions according to the "punch & die" principle and consists of an upper and lower blade, which punch the sample. A long hand lever with force transfer, makes punching easier. On the left of the device is a feeding table with integrated guide, which guarantees ease of material placement. A clamping mechanism holds the sample firmly during punching. Samples are removed from a metal sheet located below the punch.

The punch can be used for materials from 50 up to 800 gsm.

PROCESS DESCRIPTION :

The material to be punched is placed on the feeder table, and pushed along the guide rails between the upper and lower blades. Pushing the hand lever down places a safety guard on the material, which also prevents the material from slipping. The punching takes place when the lever is pushed down. After the process the sample strips fall through the lower blade onto a metal sheet, which is pulled out to remove the samples.

MODELS :

Punching size 6.0 x 0.5 in

For CCT-, RCT- and CMT-tests

Punching size 7.0 x 1.0 in

For internal bond tests

Punching size 300 x 15 mm

For tensile tests acc. to ISO and SCT-tests

Punching size 300 x 25 mm

For tensile tests acc. to TAPPI



WEIGHT AND DIMENSIONS WITH PACKING BOX :

800x600x730 mm (WxLxH), 65 Kg

PTA SPAIN

C/ Gurutzegi Nº 16 Pol. Belartza
20018 SAN SEBASTIÁN
(Guipúzcoa) - Spain

PTA FRANCE

14, rue Evariste Galois / ZAC les Ruieres
38320 EYBENS - France

PTA ASIA

50 East Coast Road #02-73 Roxy Square
428769 SINGAPORE - Singapore